

uP SUPERVIZORY






Supervizory mikrořadičů

obj. název	obj. číslo	U RST (V)	t RST (ms)	t WDT (s)	spínač zálohy	pracovní teplota (°C)	pouzdro	výstup
MAX 690A CPA	20881	4.65	200	1.6	X	0 ... +70	DIP8	/RESET, WatchDog
■ MAX 690A CSA	27450	4.65	200	1.6	X	0 ... +70	SO8	/RESET, WatchDog
■ MAX 690 CPA	22715	4.65	50	1.6	X	0 ... +70	DIP8	/RESET, WatchDog
MAX 691A CPE	04059	4.65	200	0.1@ 1.6	X	0 ... +70	DIP16	/RESET, RESET, WatchDog
MAX 691A CSE	27481	4.65	200	0.1@ 1.6	X	0 ... +70	SO16	/RESET, RESET, WatchDog
■ MAX 691 CPE	04060	4.65	50	0.1@ 1.6	X	0 ... +70	DIP16	/RESET, RESET, WatchDog
MAX 691 CWE	22938	4.65	50	0.1@ 1.6	X	0 ... +70	SO16W	/RESET, RESET, WatchDog
MAX 695 EWE	27548	4.65	200	0.1@ 1.6	X	-40 ... +85	SO16W	/RESET, RESET, WatchDog
MAX 698 CPA	27572	4.65	140	--	--	0 ... +70	DIP8	/RESET
MAX 705 CPA	27629	4.65	200	1.6	--	0 ... +70	DIP8	/RESET, WatchDog
■ MAX 707 CPA	27676	4.65	200	--	--	0 ... +70	DIP8	RESET
MAX 708 CPA	27686	4.40	200	--	--	0 ... +70	DIP8	RESET
MAX 791 CPE	28206	4.65	200	0.01 ... 1.6	X	0 ... +70	DIP16	/RESET, WatchDog
MAX 805L CPA	19497	4.65	200	1.6	X	0 ... +70	DIP8	RESET, WatchDog
MAX 809L EUR-T	28391	4.63	240	--	--	-40 ... +85	SOT-23-3	/RESET
MAX 809MEUR-T	28392	4.38	240	--	--	-40 ... +85	SOT-23-3	/RESET
MAX 809REUR	23246	2.63	240	--	--	-40 ... +85	SOT-23-3	/RESET
MAX 810L EUR-T	28396	4.63	240	--	--	-40 ... +85	SOT-23-3	RESET
■ MAX 813L CPA	23634	4.65	200	1.6	--	0 ... +70	DIP8	RESET, WatchDog
■ MAX 1232 CPA	04064	4.5 @ 4.75	610	0.15@ 0.6@ 1.2	--	0 ... +70	DIP8	/RESET, RESET, WatchDog
■ MAX 1232 CSA	24428	4.5 @ 4.75	610	0.15@ 0.6@ 1.2	--	0 ... +70	SO8	/RESET, RESET, WatchDog
■ MAX 1232 EPA	24431	4.5 @ 4.75	610	0.15@ 0.6@ 1.2	--	-40 ... +85	DIP8	/RESET, RESET, WatchDog
■ MAX 1232 ESA	24432	4.5 @ 4.75	610	0.15@ 0.6@ 1.2	--	-40 ... +85	SO8	/RESET, RESET, WatchDog

Supervizory mikrořadičů

obj. název	obj. číslo	U RST (V)	t RST (ms)	t WDT (s)	spínač zálohy	pracovní teplota (°C)	pouzdro	výstup
MC 34064 P -5	30845	4.62	--	--	--	0 ... +70	TO 92	ON, OFF
■ TL 7705 ACP	37027	4.55	1.3	--	--	0 ... +70	DIP 8	/RESET, RESET
LM 809M3X -4.63	47507	4.63	--	--	--	-40 ... +105	SOT 23	/RESET
MC 33164 D5SMD	47168	4.27	--	--	--	-40 ... +85	SO 8	/RESET
■ TL 7702 ACD SMD	34948	2.53	1.3	--	--	0 ... +70	SO 8	/RESET, RESET
■ TL 7705 ACD SMD	40867	4.55	1.3	--	--	0 ... +70	SO 8	/RESET, RESET
TPS 3824-50 DBVT	45795	4.55	--	--	--	-40 ... +85	SOT 23-5	/RESET

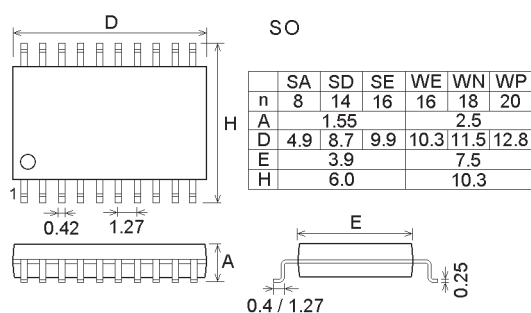

Detektory úrovně napětí



obj. název	obj. číslo	Uref (V)	I out max (mA)	Ucc (V)	Icc (µA)	pracovní teplota (°C)	pouzdro	charakteristika
MAX 8211 CPA	28480	1.5 ±3.5%	7	2.0 ... 16.5	20	0 ... +70	DIP8	nastavení vnějšími odpory
MAX 8212 CPA	28499	1.5 ±3.5%	35	2.0 ... 16.5	20	0 ... +70	DIP8	nastavení vnějšími odpory